

# GasBoy CFN Systems

## Veeder-Root Hardware Requirements

The following equipment is required to interface the TLS to the Gasboy CFN system:

- One Gasboy Dispenser Interface Module
- One installation kit (see Table 1 on page 5).

## Veeder-Root Software Requirements

- System software 349511-1XX-A, or 3XX-A (or higher)

## GasBoy System Requirements for BIR Interface

Console must be Site Controller II, version 2.0 or later and have “Send All Messages” feature.

GasBoy junction box (P/N C05020).

All Profit Point Broadcast messaging enabled.

Non-blended dispensers (not a restriction for ISD only applications).

## Connecting to the Site Controller II

The TLS-350R must be connected to the Console Loop of the Site Controller II to receive BIR data from the CFN (see Figure 20).

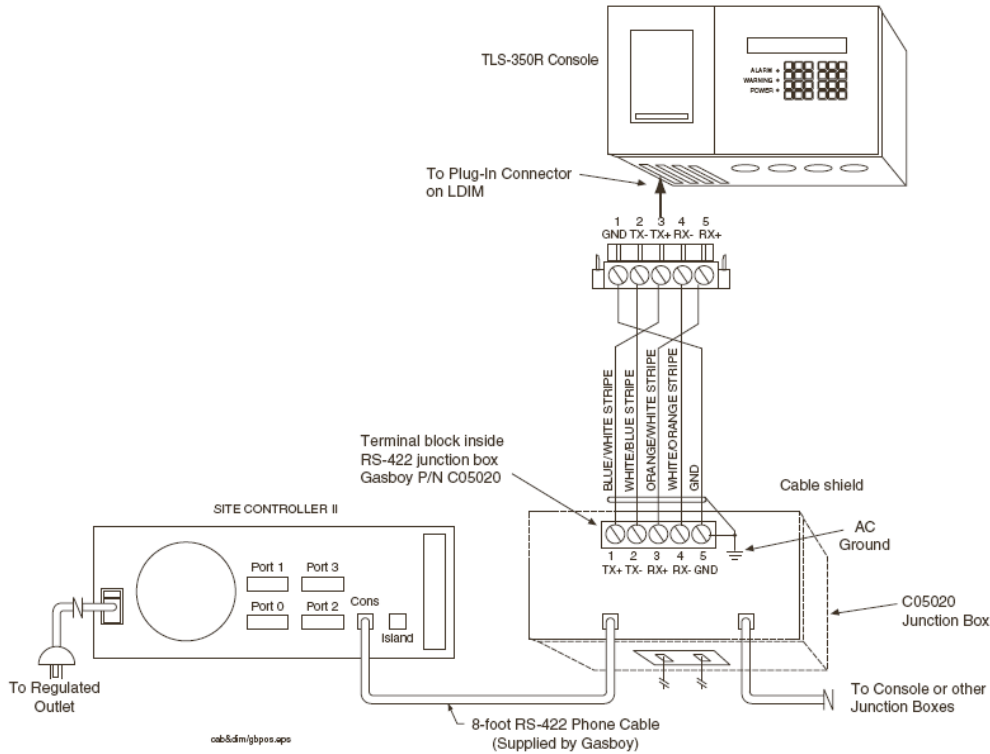


Figure 20. Gasboy Console Loop Connection