

Highline™ Satellite High Gallonage Models

Model No.	Description
AC4093-S1	Highline 111B Single One-Product Satellite Dispenser
AC6093-S1	Highline 111B Dual Two-Product Satellite Dispenser

Load Table

See wiring diagrams for Conventional, Super-Hi™ and Ultra-Hi™ High Gallonage.

Operating Environment

Relative Humidity	20% to 95% non-condensing
Minimum Outside Ambient Temperature	-22°F (-30°C)
Maximum Outside Ambient Temperature	104°F (40°C)

Weights

Highline 111B Single One-Product Satellite

Dispenser Weight 180 pounds/81 kilograms

Highline 111B Dual Two-Product Satellite


Dispenser Weight 235 pounds/106 kilograms

Model Number Breakdown • Hydraulics

AC X X X X X X XXXXX

- A. U.S. _____
- C. Electronic Pump or Dispenser _____
- B. Highline™ Series _____
- F. International Highline Series _____
- A. Dispenser, Standard Gallonage _____
- B. Pump, Standard Gallonage _____
- C. Dispenser, Conventional High Gallonage _____
- D. Pump, Conventional High Gallonage _____
- E. Dispenser, Conventional High Gallonage Master (for satellite) _____
- F. Dispenser, Satellite (less CD module) _____
- G. Pump, PUS High Gallonage (with 1" piping) _____
- J. Pump, PUS Intermediate Gallonage (with 3/4" piping) _____
- K. Dispenser, Super-Hi™ High Gallonage Master (for satellite) _____
- L. Dispenser, Ultra-Hi™ High Gallonage Master (for satellite) _____
- M. Dispenser, Ultra-Hi Satellite (less CD module) _____
- N. Dispenser, Ultra-Hi™ High Gallonage Combo (with satellite) _____
- P. Pump, Standard Gallonage (with sump flow control) _____
- R. Pump, Conventional High Gallonage (with sump flow control) _____
- S. Dispenser, Conventional High Gallonage Combo (with satellite) _____
- T. Dispenser, Super-Hi™ High Gallonage Combo (with satellite) _____
- 2. Pump, PUS Intermediate Gallonage (with 3/4" piping and sump flow control valve) _____
- A. Single Product _____
- B. Dual One-Product _____
- C. Dual Two-Product _____
- D. Dual One-Product (rotated nozzle putdowns) _____
- G. Single Product (rotated nozzle putdowns) _____
- B. U.S. Gallons Totalizers, Vapor Recovery Nozzle Hook and Boot _____
- K. Metric Totalizers, Vapor Recovery Nozzle Hook and Standard Boot _____
- G. Metric Totalizers, Standard Nozzle Hook and Vapor Recovery Nozzle Boot _____
- N. Imperial Gallons Totalizers, Vapor Recovery Nozzle Hook and Standard Boot _____
- A. Fillup _____
- B. Preset _____
- A. First Major Revision _____
- M. Universal Hydraulics (value analyzed) _____

Reference _____


Gilbarco	
MFG. BY GILBARCO INC. GREENSBORO, N.C. U.S.A.	
MODEL	AM2222A
SERIAL NO.	HX BA053885
HYDRALIC MODEL NO.	AC2PDK00A.001
TRANSAC	12
 UNDERWRITERS LABORATORIES INC. ©	
<small>POWER OPERATED DISPENSER DEVICE FOR FLAMMABLE LIQUIDS FOR USE ONLY WITH UL LISTED INTERMEDIATE & GROSSER STATION TYPE PUMP NOZZLE VALVE</small>	
NO. IN	

Gilbarco	
MFG. BY GILBARCO INC. GREENSBORO, N.C. U.S.A.	
SERIAL NO.	
MODEL NO.	AC2PDK00A.001



Highline™ Satellite High Gallonage Dispenser

Highline™ 111B
Single One-Product Satellite Dispenser
Dual Two-Product Satellite Dispenser

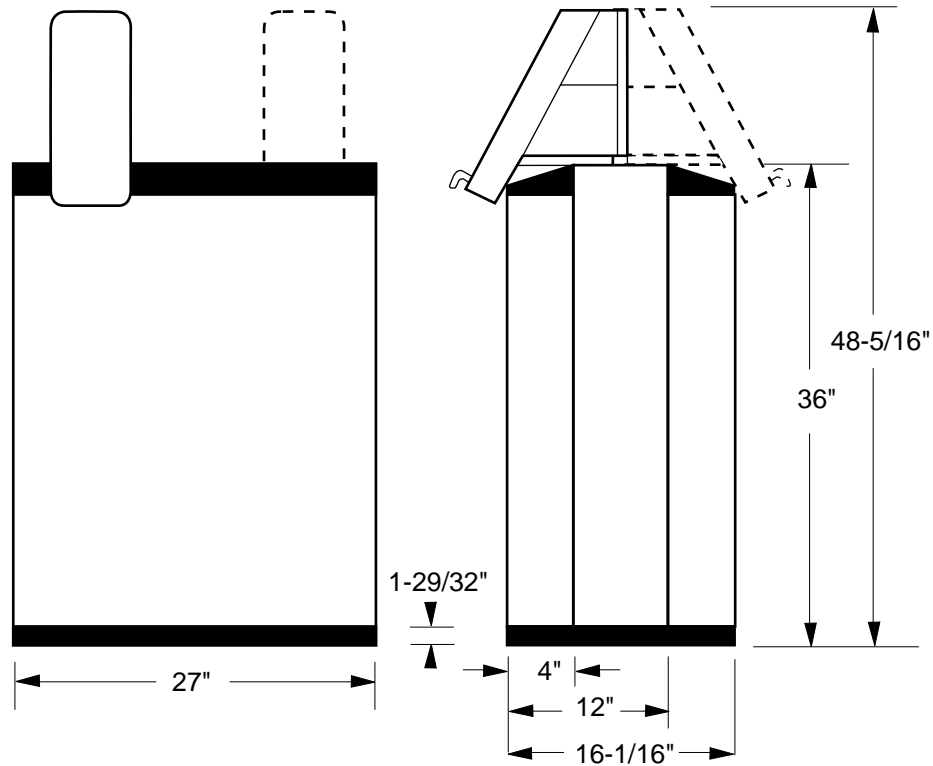

Screening Specifications

Lower Doors

Overall: 40.83" H x 28.34" W

(Total Blank Area)

Flat Surface: 32.28" H x 24.67" W

(Maximum Viewing Area)

Highline™ Satellite High Gallonage Dispenser

Highline™ 111B
Single One-Product Satellite Dispenser
Dual Two-Product Satellite Dispenser

