

RED JACKET®
PUMPS

OVERHEAD RETRACTOR INSTALLATION INSTRUCTIONS

MODEL NO. 884-012-5 (3 Ft. Post) 5/8" or 3/4" Hose
MODEL NO. 884-016-5 (3 Ft. Post) 1" Hose
MODEL NO. 884-013-5 (4 Ft. Post) 5/8" or 3/4" Hose
MODEL NO. 884-017-5 (4 Ft. Post) 1" Hose
MODEL NO. 884-023-5 (3 Ft. Post) 5/8" or 3/4" Hose w/ M.D. Reel
MODEL NO. 884-024-5 (4 Ft. Post) 5/8" or 3/4" Hose, w/ M.D. Reel

NOTE: Do not use any of these models on electronic dispensers. Use Model No. 884-014-5, 884-018-5 (6.5 Ft. Post) or 884-011-5, 884-015-5 (Box Only) instead.

IT IS THE RESPONSIBILITY OF THE INDIVIDUAL PERFORMING THE INSTALLATION TO COMPLY WITH ALL LOCAL CODES AND SAFETY REGULATIONS REGARDING GASOLINE AND VAPORS.

POST INSTALLATION

1. Remove the front panel(s) at the top of the dispenser. Drill two 3/8" mounting holes 4" O.C. where the post can be solidly secured through both the sheet metal and upper frame. See Figure 1 below. Use care to avoid interfering with the rest switch or nozzle swing handle.
2. Mount the post with the (2) 3/8" - 16 x 1" cap screws, (2) lockwashers, (4) flat washers, and (2) nuts as shown in Figure 1.
3. Cover the post holes with the (2) caplugs provided.

HOSE INSTALLATION

A 5/8" or 3/4" I.D., U.L. Listed hose up to 17 ft. long is typically used on Model 884-012/884-013/884023/884024*

A 1" I.D., U.L. Listed hose up to 15 ft. long is typically used on Model 884-016/884-017*

* Hose length referenced is based on standard softwall hose. Mounting configuration, hose type and climate may affect flexibility of hose. (Retractors for use with 5/8" or 3/4" I.D. hose are available with either standard or heavy-duty reels.)

1. Slip the hose into the clamp provided and adjust until the bottom of the loop clears the curb. See Figure 2 below. Tighten securely.
2. Pull the hose to its full length. It should extend easily and then retract completely.
3. If adjustment is required in spring tension, remove the (4) screws from the cover, extend cable approximately 18", wind or unwind one turn at a time and repeat step 2.

FIGURE 1


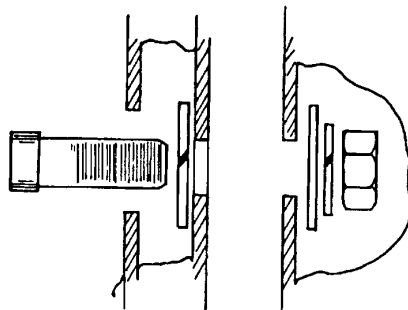


FIGURE 2

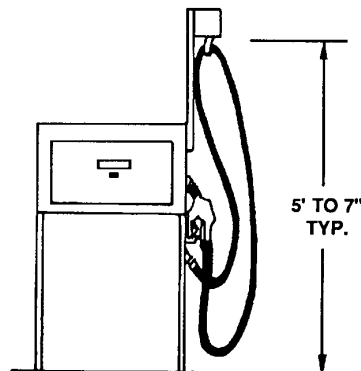

WARRANTY

RED JACKET OVERHEAD RETRACTOR

This warranty is a LIMITED warranty. Anything in the warranty notwithstanding, IMPLIED WARRANTIES FOR PARTICULAR PURPOSE AND MERCHANTABILITY SHALL BE LIMITED TO THE DURATION OF THE EXPRESS WARRANTY. MANUFACTURER EXPRESSLY DISCLAIMS AND EXCLUDES ANY LIABILITY OF CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY.

WARRANTY

Red Jacket Overhead Retractors are guaranteed as to workmanship, material and performance when properly installed, used and cared for. Should any part, or parts, prove defective within 90 days from date of installation, it will be replaced F.O.B. destination without charge, provided the part (or parts) is returned transportation charges prepaid. No allowance will be made for labor, transportation, or other charges incurred in the replacement or repair of defective parts by customer. We will not be responsible for labor charges, loss, or damages caused by the use of this product. This warranty does not apply when damage is caused by careless handling, improper installation or normal wear and tear.



by  **VEEDER-ROOT**

125 Powder Forest Drive • Simsbury, CT 06070
Tel: (860) 651-2700 • Fax: (860) 651-2719

051-141 Rev. D