



# OVERHEAD RETRACTOR INSTALLATION INSTRUCTIONS

MODEL NO. 884-011-5 (Box Only) 5/8" or 3/4" Hose  
MODEL NO. 884-015-5 (Box Only) 1" Hose  
MODEL NO. 884-026-5 (Box Only) 5/8" or 3/4" Hose w/M.D. Reel  
MODEL NO. 884-028-5 (Box Only) 5/8" or 3/4" Hose Blk. Anodized  
MODEL NO. 884-029-5 (Box Only) 5/8" or 3/4" Hose Blk. Anodized

## BOX INSTALLATION

The Red Jacket Overhead Retractors listed above are intended to be mounted onto a crossbar. On small spans, 2" x 2" 1/8" steel tubing, properly supported, has been successfully used.

IT IS THE RESPONSIBILITY OF THE INDIVIDUAL PERFORMING THE INSTALLATION TO COMPLY WITH ALL LOCAL CODES AND SAFETY REGULATIONS REGARDING GASOLINE AND VAPORS.

1. Install crossbar at desired height, usually 5-7 Ft. above the island.
2. Drill 3/8" mounting holes in the crossbar at the selected location.
3. Mount the Red Jacket Retractor Box using the (2) 3/8" - 16 x 3-1/2" hex bolts, (2) flat washers and (2) nuts as shown in Figure 2.

## HOSE INSTALLATION

A 5/8" or 3/4" I.D., U.L. listed hose up to 17 ft. long is typically used on Models 884-011/884-026/884-028/884-029.\* A 1" I.D., U.L. listed hose up to 15 ft. long is typically used on Model 884-015.\*

\*Hose length referenced is based on standard softwall hose. Mounting configuration, hose type and climate may affect flexibility of hose. (Retractors for use with 5/8" or 3/4" I.D. Hose are available with either standard or heavy-duty reels.)

1. Slip the hose into the clamp provided and adjust until the bottom of the loop clears the curb. See Figure 2 below. Tighten securely.
2. Pull the hose to its full length. It should extend easily and then retract completely.
3. If adjustment is required in spring tension, remove the (4) screws from the cover, extend cable approximately 18", wind or unwind one turn at a time and repeat step 2.

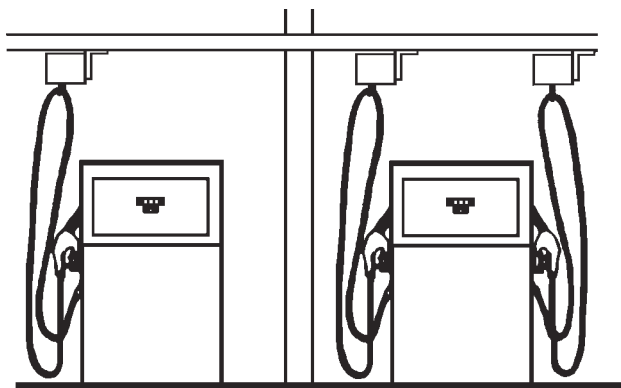


FIGURE 1

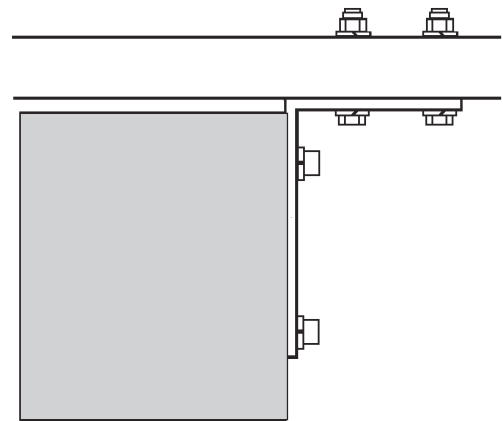


FIGURE 2



by  VEEDER-ROOT

125 Powder Forest Drive • Simsbury, CT 06070  
Tel: (860) 651-2700 • Fax: (860) 651-2719

051-143 Rev. E



# WARRANTY

## OUR PROMISE OF QUALITY:

The Marley Pump Company, a division of The Marley Company, guarantees Red Jacket products as to workmanship, material, and performance when they are properly installed, used and cared for.

## OUR COMMITMENT WITHIN THE CONTINENTAL UNITED STATES:

Should any part(s) fail within the parts period specified below, it will be repaired or replaced and returned, free of charge, provided the part(s) is returned to Red Jacket's point of manufacture transportation prepaid.

Should any part(s) fail within the labor period specified below, Red Jacket will also pay for the reasonable services of an authorized service representative for on-site repair or replacement of the defective part(s).

## SCHEDULE OF WARRANTY PERIODS:

<u>Product</u>	<u>Parts</u>	<u>Labor</u>
	From Date of Manufacture	From Date of Installation*
Submersibles	18 Months	12 Months
Leak Detectors	18 Months	6 Months
Electronic Systems	18 Months	6 Months
Except:		
Vapor Probes	6 Months	None
Retractors	6 Months	None

\*Installation date will revert to the Date of Manufacture without a previously submitted Installation Report #WAF01 which was received within 15 days after the installation. Regardless of installation date, under no condition can labor warranty extend beyond the parts warranty.

## EXCLUSIONS:

### *Normal (Routine) Maintenance:*

Normal or routine maintenance such as cleaning, lubricating or adjusting components and assemblies or for replacing consumable items such as paper, ribbons, filters, bulbs, etc., are excluded from this warranty.

### *Transportation Damage to Equipment:*

Should equipment be damaged in transit or handling, it is the responsibility of the distributor or customer to file a damage claim with the responsible carrier. Latent damage must be reported to the carrier within 14 days of the date of delivery and an inspection by the carrier must be requested. Damage caused in transit or by handling is not the responsibility of Red Jacket and is not covered.

## WARRANTY DISCLAIMER AND LIMITATION OF LIABILITY:

THE ABOVE WARRANTIES ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHICH EXCEED THE AFORESAID EXPRESSED WARRANTIES ARE HEREBY DISCLAIMED AND EXCLUDED FROM THIS AGREEMENT.

MANUFACTURER EXPRESSLY DISCLAIMS AND EXCLUDES ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ARISING IN CONNECTION WITH THIS PRODUCT, INCLUDING WITHOUT LIMITATION PURCHASER'S LOSS OF STORED LIQUIDS OR DAMAGE TO THE GROUND, UNDERGROUND OR ENVIRONMENT, WHETHER ARISING UNDER THEORIES OF TORT, NEGLIGENCE, STRICT LIABILITY, CONTRACT OR OTHERWISE.

Some states do not allow the exclusion or limitation of incidental or consequential damages or limitation on the duration of implied warranties so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.