
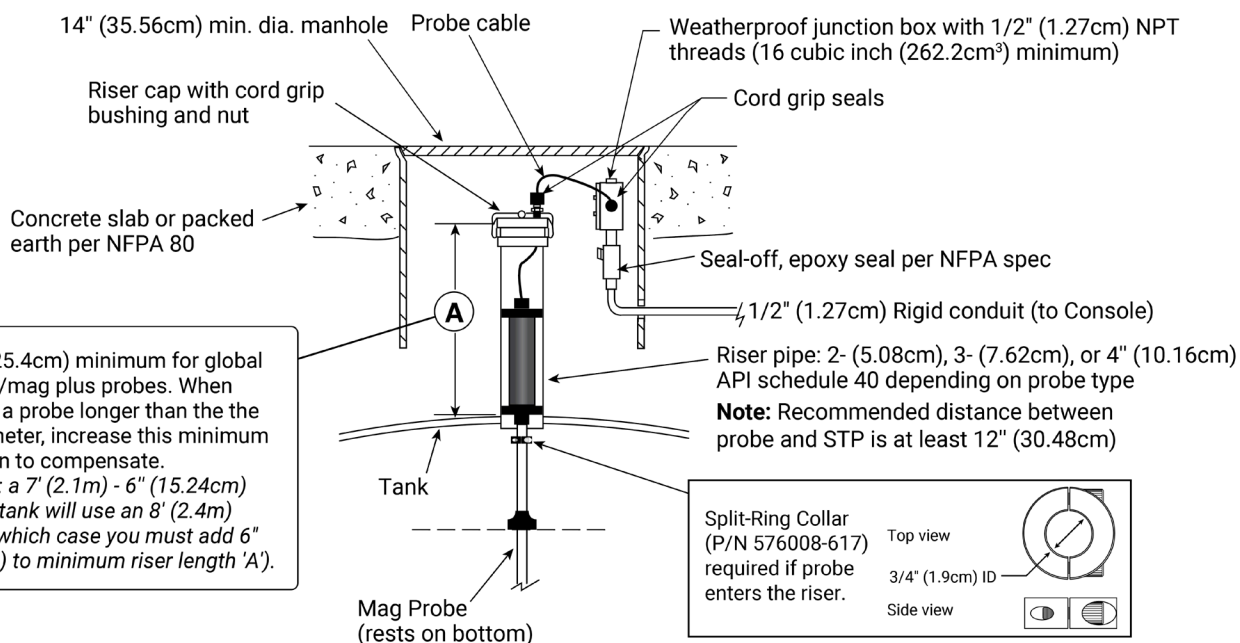


<b>Probe Description &amp; Product Application</b>	Density Mag Plus In-Tank Probe for Monitoring <b>Gasoline &amp; Diesel Products</b> in both USTs and ASTs					
<b>Specific Products Monitored / Product Compatibility</b>	<b>Part # &amp; Description</b>	<b>Approved Products</b>	<b>Monitoring Functionality</b>			
	<b>Leak Detection / BIR - AccuChart Probes</b> 1. 846396-7XX Aluminum (AL) In-Tank Probe with High Grade Polymer (HGP) Canister with Water Detection & 0.1 GPH Testing Capability, UL 2. 846396-8XX AL with HGP Canister with Water Detection & 0.2 GPH Testing Capability, UL 3. 846397-7XX Stainless Steel (SS) with HGP Canister with Water Detection & 0.1GPH Testing Capability, UL 4. 846397-8XX SS with HGP Canister with Water Detection & 0.2 GPH Testing Capability, UL  <b>No Leak Detection/Inventory Only Probes</b> 1. 846397-9XX SS with HGP Canister with Water Detection & No Leak Detection/ Inventory Only, UL	Leaded Gasoline	0.1 GPH static in-tank testing			
		Gasoline with <=7% Methanol and 8% TBA	0.2 GPH static in-tank testing			
		Gasoline with <=15% MTBE	0.2 GPH Continuous Statistical Leak Detection (CSLD)			
		Gasoline with <=17% TAME	No Leak Detection / Inventory Only			
		Regular Unleaded Gasoline	BIR – AccuChart			
		Premium Unleaded Gasoline	Density Range = 700 - 800 kg/m <sup>3</sup>			
		Gasoline with <=15% ETBE				
Gasoline with <=12% TBA						
<b>Console Compatibility</b>	<b>Maximum Probes / Console</b>	<b>Probe Interface Modules</b>				
		<b>Module Part #</b>	<b>Module Description</b>	<b># of Modules per Console</b>	<b># of Probe Inputs per Module</b>	<b>Availability</b>
TLS-450PLUS (8600 Series) - Minimum Software Version 5B with TLS-XB installed (3 max per system)	64	332812-001	Universal Sensor Module (USM) Interface for Probes, Sensors, and DPLLD	Up to 4	16	Sold Separately (either Factory Installed or as a Spare Module)
TLS4i (8601 Series) - Minimum Software Version 5B	4	No module required, probe input capability factory installed				
TLS4c (8601 Series) - Minimum Software Version 5B	2					

Form # & Description	Float Size	Cable Lengths	Min/Max Probe Length
<b>Float Installation Kits</b>			
886001-1X0 Mag-D Gasoline Float Kit	2" (5.08cm)	5' (1.5m), 10' (3.05m), 20' (6.1m)	48" (1.2m) - 144" (3.66m)
886001-1X1 Mag-D Diesel Float Kit	2" (5.08cm)		
<b>Other Installation Accessories</b>	312020-952 4" (10.16cm) NPT Riser Cap and Ring Kit for In-Tank Probes 330020-282 4" (10.16cm) Threaded NPT Riser Cap for In-Tank Probes		
<b>Specifications</b>	<b>Product</b>	<b>Water</b>	
Measurement Accuracy	+/- 0.0300" (0.762mm)	+/- 0.0300" (0.762mm)	
Resolution - One Sample Reading	+/- 0.002857" (0.072571mm)	+/- 0.002857" (0.072571mm)	
Minimum Measurement - 2" (5.08cm) Float Kits	8.00" (20.32cm)	0.87" (2.2cm)	
Operating (Working) Temperature Range	-40 to +122°F (-40 to +50°C)		
Third Party Evaluation / Agency Listings & Links	UL, cUL, ATEX, IECEx <a href="http://www.nwglde.org/evals/veeder_root_j.html">http://www.nwglde.org/evals/veeder_root_j.html</a>		
Product Installation Guide Link	<a href="https://www.veeder.com/us/technical-document-library">https://www.veeder.com/us/technical-document-library</a>		

**Example Installation**


# Notice

---

Veeder-Root makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

**Veeder-Root shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this publication.**

Veeder-Root reserves the right to change system options or features, or the information contained in this publication.

This publication contains proprietary information which is protected by copyright. All rights reserved. No part of this publication may be photocopied, reproduced, or translated to another language without the prior written consent of Veeder-Root.

## **Example Illustrations**

Illustrations used in this guide for example sensor installations may contain components that are customer supplied and not included with the sensor. Please check with your Veeder-Root Distributor for recommended installation accessories.

## **Third Party Evaluations**

Third party evaluations of the Veeder-Root sensors contained in this application guide can be found under the Veeder-Root vendor name on the National Work Group on Leak Detection Evaluations (NWGLDE) website:

<http://www.nwglde.org>