
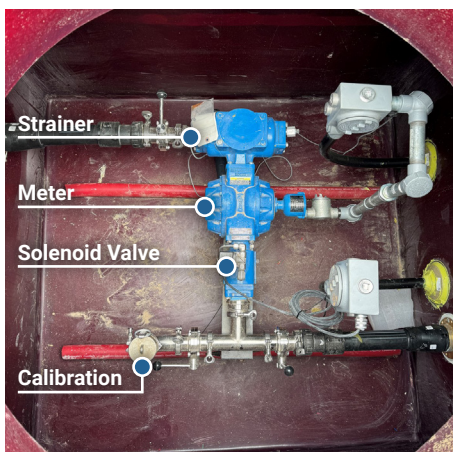


Biofuel Injection System

Automate Your Blended Fuel Program

Using the same technology as the Additive Injection System (AIS), the **Biofuel Injection System (BIS)** automatically blends incoming fuel with biofuel as it's being delivered to the tank to create blended products. Similar to the AIS, it connects to the TLS Automatic Tank Gauge (ATG) to automate the blending process and add the required amount of biofuel into the incoming stream of gasoline or diesel in small batches every few seconds to improve the consistency and uniformity of the blended product.

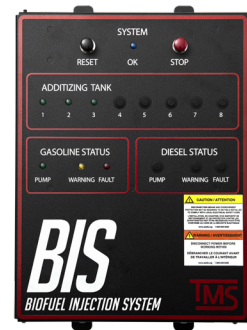

► PROVIDE BLENDED PRODUCTS AT YOUR FORECOURT WITH THE BIOFUEL INJECTION SYSTEM

- **Continuous and simultaneous operations** for up to (2) fuel tanks with standard configuration and expandable, if required
- **Flexible, scalable solution** works with different biofuels such as biodiesel and ethanol to create blends such as B20 and E15
- **Precision measurement** allows for full traceability to blend ratio and automatic adjustments to maintain blend ratios
- **Automated injections** drive an efficient fuel delivery process – No driver intervention needed
- **Leverages commonly used retail equipment** for easy serviceability by trained technicians

► BENEFITS OF THE BIOFUEL INJECTION SYSTEM FOR RETAIL FUELING OPERATIONS


- Differentiate fuel offering with biofuel blended products available at the forecourt to be compliant with environmental requirements
- Improve safety and eliminate human error
- Create fuel sourcing options by taking control of biofuels that will be blended with the products
 - *Marketers may be eligible for State or Federal biofuel blend credits for blending on-site*



DELIVER ON YOUR BRAND PROMISE OF PROVIDING PREMIUM FUEL PRODUCTS

▶ HOW IT WORKS

- 1 **The TLS-450PLUS ATG** alerts the BIS Controller that a delivery is in progress.
- 2 **The BIS Controller** receives the delivery signal and activates the blending process. The BIS Controller manages blend ratios and controls system hardware.
- 3 **Solenoid valves** open to release the flow of biofuel into the tank.
- 4 **Flow meters** monitor the dosing of biofuel quantity.
- 5 **Collar drop** positions the biofuel into the stream of the delivery.
- 6 **The BIS Controller** manages input from the flow meters and closes the solenoid valves when the desired blend ratio is met.
- 7 **The BIS Cloud** or access via third-party monitoring service, using live Application Programming Interface (API), provides access to configure and manage the system remotely.

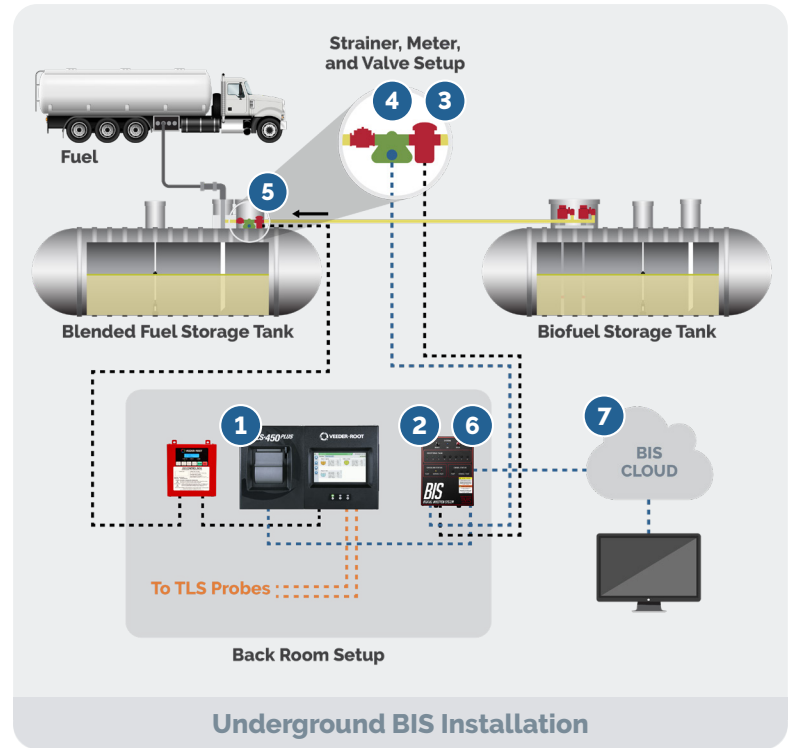

SYSTEM FLEXIBILITY TO SCALE WITH YOUR NETWORK

Install configurations can be tailored to meet your site needs

Tank Configuration	BIS Controller Only	BIS Controller with Meter Setup	BIS Controller with Meter Setup
Equipment Material	–	Carbon Steel or Aluminum	Stainless Steel
Description	BIS Controller to replace existing blending controller installed on-site to achieve automated, consistent, and homogenized biofuel blending	BIS Controller with meter, strainer, valve setup to achieve automated, consistent, and homogenized biofuel blending	BIS Controller with meter, strainer, stainless steel solenoid valve setup to achieve automated, consistent, and homogenized biofuel blending
Typical Application	Retrofit	New Builds & Retrofit	New Builds & Retrofit
Recommended For	Biodiesel Blending & Ethanol Blending	Biodiesel Blending & Ethanol Blending	Biodiesel Blending & Ethanol Blending
Number of Fuel Tanks (Diesel, Gas, or Combination)	2 tanks per controller, expandable up to 4 tanks with small expansion box	2 tanks per controller, expandable up to 4 tanks with small expansion box	2 tanks per controller, expandable up to 4 tanks with small expansion box
Install Location	<ul style="list-style-type: none"> Controller – Next to the Veeder-Root TLS Automatic Tank Gauge (ATG) 	<ul style="list-style-type: none"> Controller – Next to the Veeder-Root TLS Automatic Tank Gauge (ATG) Metering Equipment – In Blending Sump 	<ul style="list-style-type: none"> Controller – Next to the Veeder-Root TLS Automatic Tank Gauge (ATG) Metering Equipment – In Blending Sump
Remote Access	Yes	Yes	Yes

Note: Custom configurations available upon request.